



SURFACE MOUNT SUPER FAST RECTIFIER

ES1A THRU ES1J

VOLTAGE RANGE

50 to 600 Volts

CURRENT

1.0 Ampere


FEATURES

- Plastic package has underwrites laboratory flammability Classification 94V-0
- Glass passivated chip junction
- Built-in strain relief
- Super Fast switching speed for high efficiency
- High temperature soldering guaranteed 250°C/10 seconds

MECHANICAL DATA

Case: Transfer molded plastic

- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.002ounce, 0.064 gram

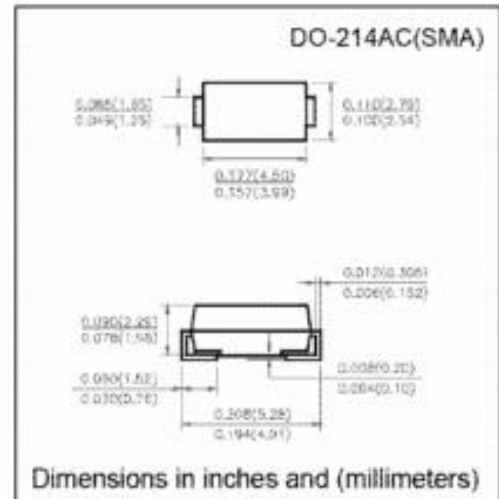

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.

		SYMBOLS	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	UNIT
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage		V_{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current At $T_A=55^{\circ}\text{C}$ (NOTE 1)		$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)		I_{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A		V_F	0.95			1.25		1.7		Volts
Maximum DC Reverse Current at rated DC blocking voltage at	$T_A = 25^{\circ}\text{C}$	I_R	5.0							μA
	$T_A = 125^{\circ}\text{C}$		100							
Maximum Reverse Recovery Time Test conditions $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$		t_{rr}	35							nS
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)		C_j	10				8			pF
Typical Thermal Resistance (NOTE 1)		$R_{\theta JA}$	88							$^{\circ}\text{C/W}$
		$R_{\theta JL}$	28							
Operating Junction Temperature		T_j	(-55 to +150)							$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	(-55 to +150)							$^{\circ}\text{C}$

Notes:

1. Thermal resistance from Junction to ambient and from junction to lead mounted on PCB, with 0.2×0.2" (5.0 × 5.0mm) copper pad areas.



SURFACE MOUNT SUPER FAST RECTIFIER

ES1A THRU ES1J

VOLTAGE RANGE

50 to 600 Volts

CURRENT

1.0 Ampere

RATING AND CHARACTERISTIC CURVES ES1A THRU ES1J

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

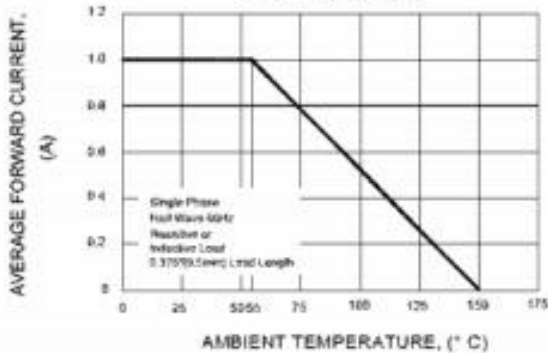


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

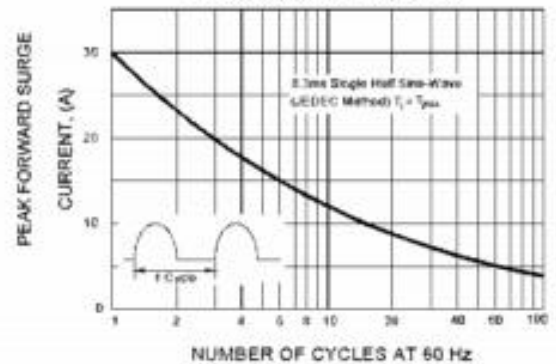


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

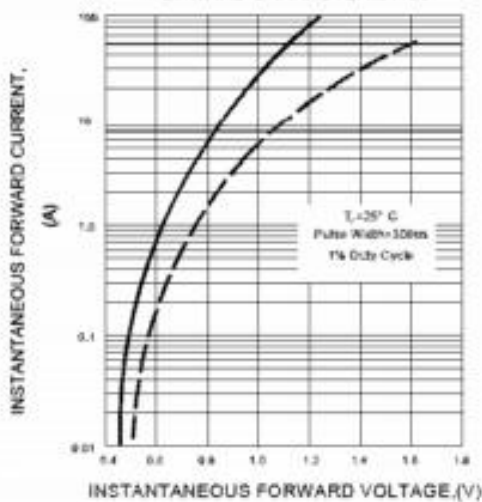


FIG.4-TYPICAL REVERSE CHARACTERISTICS

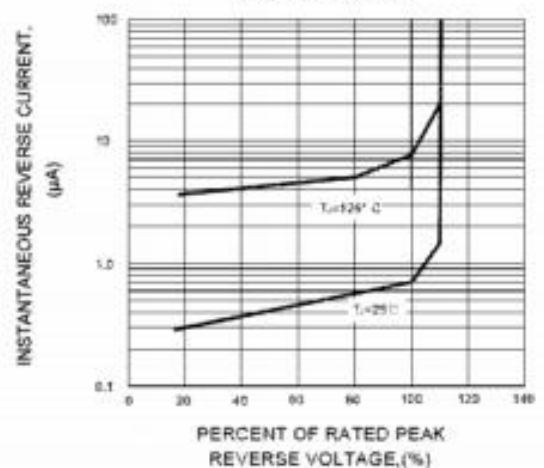


FIG.5-TYPICAL JUNCTION CAPACITANCE

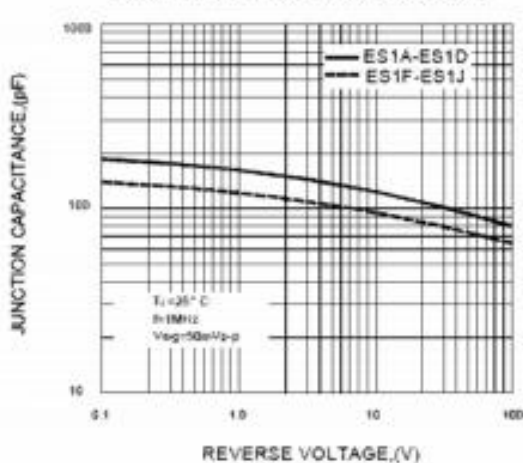


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

